

Specifications

Adjustable Wall Sleeve NFP Accessories for NFP


January 31, 2020

Inaba Denki Sangyo. Co., Ltd.
Research & development division

1. Product specifications

Specifications for Adjustable Wall Sleeve are shown below.

Dimensions

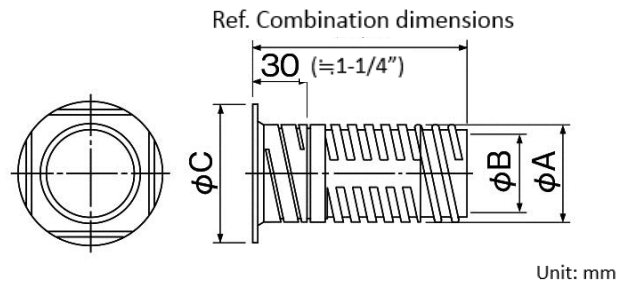

Item No.	φA (outer diameter)	φB (internal diameter)	φC	Core drill diameter
NFP-60	61.5 (≒ 2-1/2")	50.5 (≒ 2")	85 (≒ 3-3/8")	65 (≒ 2-5/8")
NFP-65	66.5 (≒ 2-5/8")	55.5 (≒ 2-1/4")	90 (≒ 3-5/8")	70 (≒ 2-7/8")
NFP-75	76.5 (≒ 3-1/8")	65.5 (≒ 2-5/8")	100 (≒ 4")	80 (≒ 3-1/4")


Material: PE

Color: Ivory

NOTE: - Due to the structure of the product, the length cannot be adjusted between 105mm and 127mm (≒ 4-1/4"-5").

- Joint, fixing and penetration points must be waterproofed with caulk or putty.

■ Combination dimension table

A (Flange)	B (Body)	C (End)	
			
Parts Combination		Adjustment Length	NFP's required quantity
A+B		99~105 mm (≒4"- 4-1/4")	1 set
A+C			
A+B+C		127~180 mm (≒5"- 7-1/8")	1 set
A+B+B+C		196~255 mm (≒7-3/4"- 10-1/8")	2 sets
A+B+B+B+C		265~330 mm (≒10-1/2"- 13")	3 sets

NOTE: - Secure at least 24 mm (≒ 1") for the screw-in deepness between the parts.


Above adjustment length is with 24mm screw-in deepness.

- The dimensions do not change even if Wall Cap NWC is attached to Part B or Part C.

- If part A is removed and Wall Cap is attached to both ends, it will be about 10 mm shorter.

2. Related components

2-1. Wall Cap NWC for Adjustable Wall Sleeve NFP

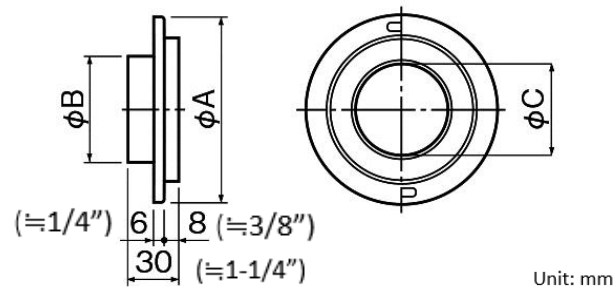


Item No.	φA	φB (outer diameter)	φC (Inner diameter)
NWC-60	112 (≅4-1/2")	63.5 (≅2-1/2")	55.5 (≅2-1/4")
NWC-65	117 (≅4-5/8")	68.5 (≅2-3/4")	60.5 (≅2-1/2")
NWC-75	127 (≅5")	78.5 (≅3-1/8")	70.5 (≅2-7/8")

Material: ABS

Color: Ivory

NOTE: NWC can be used only with NFP. NWC can't be used alone.

2-2. Wall Cap Lid for Adjustable Wall sleeve

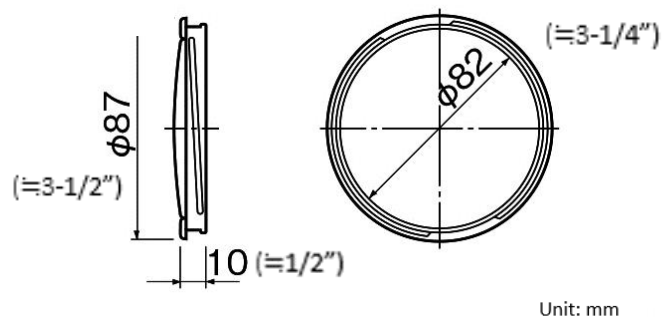

Item number: NWM-C

Material :PP

Color: Ivory

NOTE: NWC-C can be used only with NWC. NWC-C can't be used alone.